

Digital X-Ray

Easy as 1,2,3

Choose your **1** image size **2** resolution **3** price

SINGLE TOUCH monitor system

Digital Vet
14 x 17 - 2.8 LP/mm

Digital Vet HR
12 x 16 - 3.3 LP/mm

Digital Vet DX-9
17 x 17 - 3.4 LP/mm

Digital Vet DX-16
17 x 17 - 4.6 LP/mm



Digital or Film

Your Full Range of Veterinary Specific X-Ray Equipment - Film, Digital, & Large Animal



Standard Vet



Flouro Vet



Premium Vet


Sedecal "Standard" Features:

- High Frequency Generators
- Anatomical Programming (Built in Technique Chart)
- Four-way float top table
- Hands free collimator light control
- Rotor Break on X-ray tube
- Electrical Options
 - Single Phase 208-240 VAC / 100 AMP
 - Three Phase 208 VAC / 70 AMP
 - Battery 100 VAC / 20AMP
- Heaviest Construction Available
- Digital Ready Technology on all Film systems
- 5 year warranty on X-Ray System
- Ask for warranty details on Digital components.

Digital Vet - "Single Touch" monitor system

	Digital Vet & Digital Vet HR (Std Vet, Premium Vet)	Digital Vet DX-9 Digital Vet DX-16
Constant Potential Power Ratings	32kW	40kW
kVp RANGE in 1 kVp step increments	40 - 125	40 - 125
mA STATIONS	10, 12.5, 16, 20, 25, 32 40, 60, 64, 80, 100, 125 160, 200, 250, 320, 400	10, 12.5, 16, 20, 25, 32, 40 60, 64, 80, 100, 125, 160 200, 250, 320, 400, 500
EXPOSURE TIME RANGE	0.001 - 10 seconds	0.001 - 10 seconds
mAS range	0.1 - 500 mAs	0.1 - 500 mAs

Measurements of primary system(s):

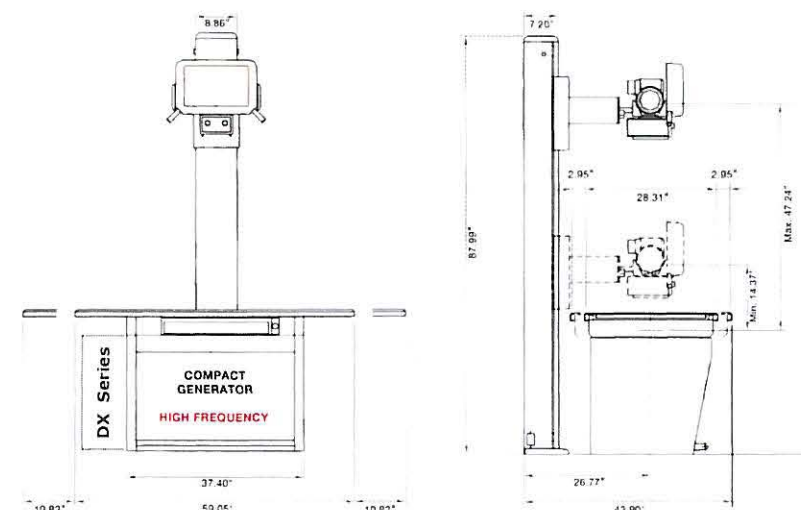

www.vetray.com

800.920.9525



Specifications subject to change without prior notice



by SEDECAL



All Star X-ray, Inc.
YOUR IMAGE IS OUR BUSINESS

(866) 381-4079
3029 East Randol Mill Road
Arlington, TX 76011
www.allstarxray.com